

Выключатели безопасности AR

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: auh@nt-rt.ru || сайт: <https://akusense.nt-rt.ru>

Safety door lock



Apperance

Standard		EN60947-5-1、GB14048.5	
Degree of protection		IP67	
Material		PA66 flame retardant	
usage count	Machiane	>1 million times	
	Electric	more than 150,000 times	
Type		AC-15	DC-13
Operating voltage		240V	24V
Operating current		3A	2A
Contact resistance		less than 25m Ω	
Rated insulation voltage		300V	
Protection against electric shock		Class II (double insulation)	
Pulse voltage		2.5KV	
Insulation resistance		less than 100m Ω (under 500VDC)	
Short circuit protection device		10A, 250V requires quick-blow fuse	
Vibration resistance		10-55HZ double amplitude 1.5mm	
Shock proof	Durable	1000m/s	
	Misoperation	300m/s	
Conditional short circuit current		100A	
Contact pitch		more than2x2mm	
Forced breaking force		Standard type: minimum 60N; strong tension type: minimum 80N	
Force break line pretravel		more than10mm	
Operating speed		0.1m ~ 0.5m/s	
Allowable operating frequency		Up to 20 operations/minute	
Pollution degree (use environment)		3 (EN60947-5-1)	
Ambient temperature		-10℃ ~ + 70℃ without freezing	
Use environment		85%RH	
Model NO.		AR1 series	

Selection coding rules


AR①-②③④

NO.	Classification	Explantion of model numbers
①	Installation method	1: Horizontal installation 2: Vertical installation 3: Adjustable mount (horizontal) 4: Adjustable mount (horizontal/vertical)
②	Conduit port/ connector size	P: Pg13.5 (terminal type) M: M20 (terminal type) 2M: Standard lead wire type(2m) 2ME: Bending resistant lead wire lead type(2m)
③	Built-in switch	A: 1NC/1NO (slow motion) B: 2NC (slow motion) C: 2NC/1NO (slow motion) D: 3NC (slow motion)
④	Head installation direction	P: Choice of four mounting orientations (delivered front mounting) / plastic U: Choice of four mounting orientations (delivered front mounting) / metal

Safety door lock

Unit: mm

Dimensions

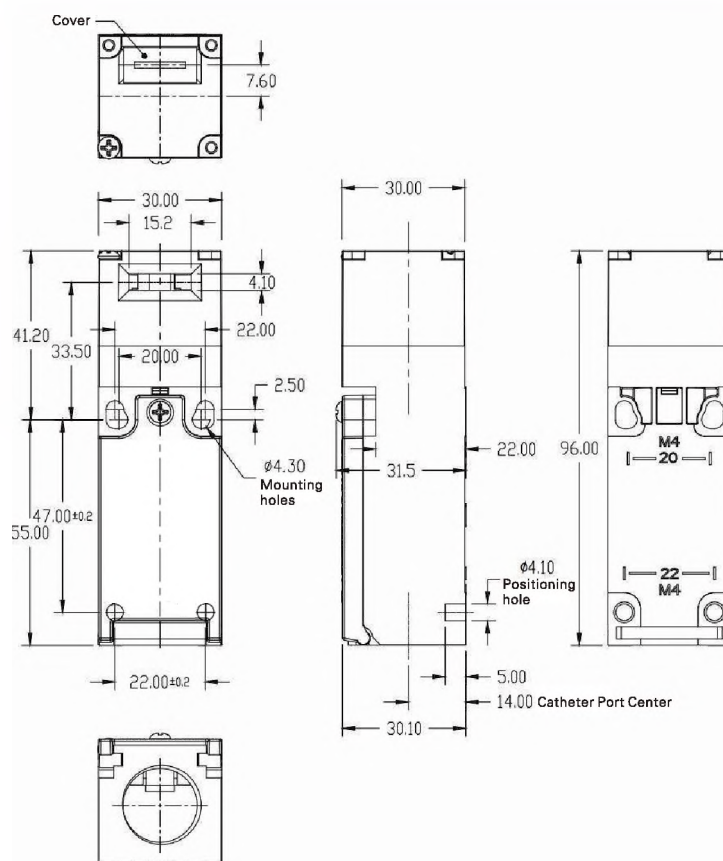

SAFETY DOOR LOCK



Apperance			
Standard		EN60947-5-1、 GB14048.5	
Degree of protection		IP67	
Material		PA66 Flame retardant	
Usage count	Machiane	More than 1 million times	
	Electric	More than 150,000 times	
Type	AC-15		DC-13
Operating voltage	240V		24V
Operating current	3A		2A
Contact resistanc		Less than 25mΩ	
Rated insulation voltage		300V	
Protection against electric shock		Class II (double insulation)	
Pulse voltage		2.5KV	
Insulation resistance		More than100mΩ	
Short circuit protection device		10A, 250V Requires quick-blow fuse	
Vibration resistance		10-55HZ Double amplitude 1.5mm	
Shock proof	Durable	1000m/s²	
	Misoperation	300m/s²	
Conditional short circuit current		100A	
Contact pitch		More than 2x2mm	
Forced breaking force		Minimum 60n	
Force break line pretravel		More than 10mm	
Operating speed		0.1m ~ 0.5m/s	
Allowable operating frequency		Up to 30 operations/minute	
Pollution degree (use environment)		3 (EN60947-5-1)	
Ambient temperature		-10℃ ~ + 50℃ without freezing	
Use environment		Under 95%rh	
Model NO.		AR2 Series	

Selection coding rules


AR①-②③④⑤⑥⑦⑧

NO.	Classification	Explantion of model numbers
①	Installation method	1: Horizontal installation 2: Vertical installation 3: Adjustable mount (horizontal) 4: Adjustable mount (horizontal/vertical)
②	Conduit port/connector size	P:Pg13.5 (terminal type) M:M20 (terminal type)
③	Switch contacts (door opening and closing detection test switch + lock monitoring switch)	A: 1NC/NO Slow contact + 1NC/1NO Slow contact B: 1NC/1NO Slow contact +2NC Slow contact C: 2NC Slow contact + 1NC/NO Slow contact D: 2NC Slow contact + 2NC Slow contact E: 2NC/1NO Slow contact + 1NC/NO Slow contact

NO.	Classification	Explanation of model numbers
③	Switch contacts (door opening and closing detection test switch + lock monitoring switch)	F: 2NC/1NO Slow contact + 2NC Slow contact G: 2NC/1NO Slow contact + 2NC/NO Slow contact H: 3NC Slow contact + 1NC/NO Slow contact I: 3NC Slow contact + 2NC Slow contact J: 3NC Slow contact + 3NC Slow contact K: 3NC Slow contact + 2NC/1NO Slow contact L: 2NC/1NO Slow contact + 3NC Slow contact
④	Head installation direction	P: Choice of four mounting orientations (delivered front mounting) / plastic U: Choice of four mounting orientations (delivered front mounting) / metal
⑤	Door lock/release method	A: Mechanical lock/DC24V electromagnetic release B: Mechanical lock/AC110V electromagnetic release G: DC24V electromagnetic lock/mechanical release H: AC110V electromagnetic lock/mechanical release
⑥	Release key position	F: Top S: Front
⑦	Indicator light	Blank: standard DC24V (green LED indicator) B: DC24V (orange LED indicator light)
⑧	Release key type	Blank: Standard type (resin) H: Special release key (resin, release key included)

Unit: mm

Dimensions

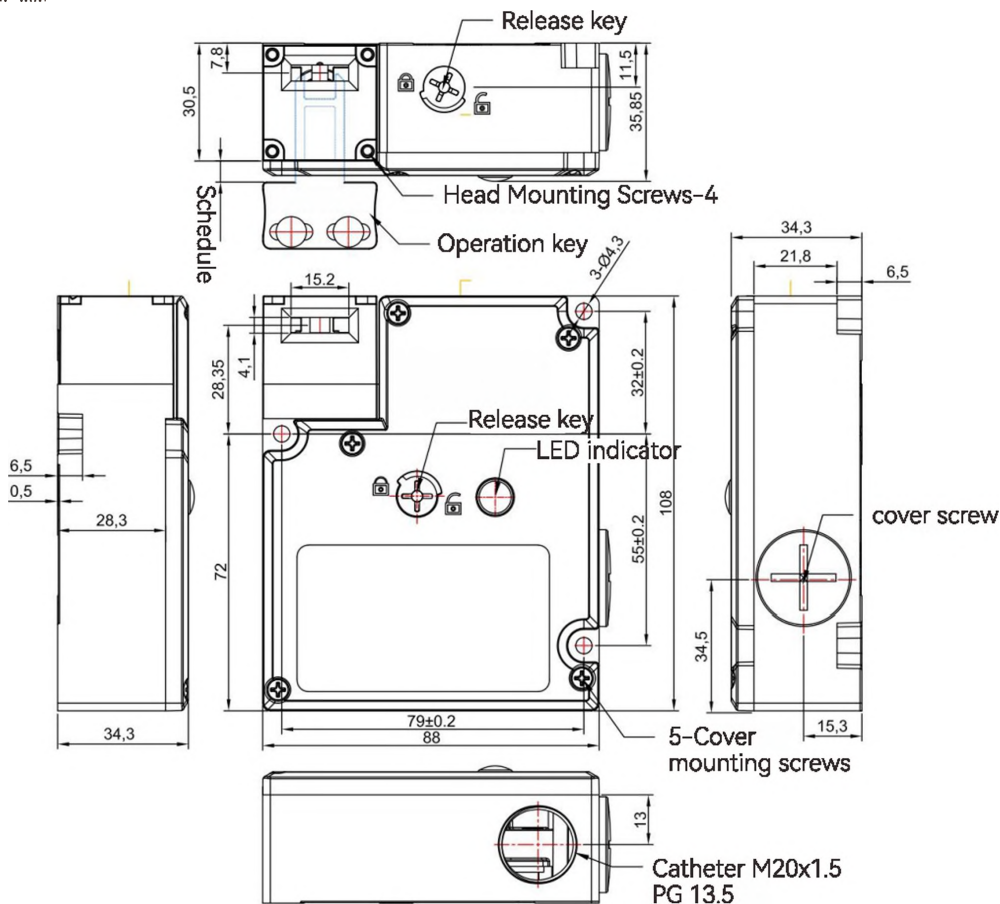

SAFETY DOOR LOCK




Apperance		
Standard	EN60947-5-1、GB14048.5	
Degree of protection	IP67	
Material	PA66 Flame retardant	
Usage count	Machiane	More than 1 million times
	Electric	More than 500,000 times (AC240V 3A, resistive load)
Type	AC-15	DC-13
Operating voltage	240V	24V
Operating current	3A	2A
Contact resistanc	Less than 25mΩ	
Rated open current	10A	
Rated insulation voltage	300V	
Protection against electric shock	Class II (double insulation)	
Pulse voltage	2.5KV	
Insulation resistance	More than100mω	
Short circuit protection device	10A, 250V Requires quick-blow fuse	
Vibration resistance	10-55HZ Double amplitude 1.5mm	
Shock proof	Durable	1000m/s²
	Misoperation	300m/s²
Conditional short circuit current	100A	
Contact pitch	More than 2x2mm	
Forced breaking force	Min 60n	
Force break line pretravel	More than 10mm	
Operating speed	0.1m ~ 0.5m/s	
Allowable operating frequency	Up to 30 operations/minute	
Pull strength when locked	1300N	
Pollution degree (use environment)	3 (EN60947-5-1)	
Ambient temperature	-10°C ~ + 50°C without freezing	
Use environment	Less than 95%rh	
Model NO.	AR3 Series	

Selection coding rules

AR ① - ② ③ ④ ⑤

NO.	Classification	Explantion of model numbers
①	Installation method	1: Horizontal installation 2: Vertical installation 3: Adjustable mount (horizontal) 4: Adjustable mount (horizontal/vertical)
②	Conduit port/connector size	P: Pg 13.5 terminal type M: M20 terminal type
③	Switch contacts (door opening and closing detectiontest switch + lock monitoring switch	A: 1NC Slow contact + 1NO Slow contact B: 2NC Slow contact + 1NC/NO Slow contact C: 1NC Slow contact + 1NC Slow contact

NO.	Classification	Explanation of model numbers
③	Switch contacts (door opening and closing detection test switch + lock monitoring switch)	D: 1NC Slow contact + 2NC Slow contact E: 2NC Slow contact + 2NO Slow contact F: 1NC Slow contact + 1NC/NO Slow contact G: 2NC Slow contact + 2NC Slow contact
④	Head installation direction	P: Choice of four mounting orientations (delivered front mounting) / plastic U: Choice of four mounting orientations (delivered front mounting) / metal
⑤	Door lock/release method	A: Mechanical lock/DC24V electromagnetic release B: Mechanical lock/AC110V electromagnetic release G: DC24V electromagnetic lock/mechanical release H: AC110V electromagnetic lock/mechanical release

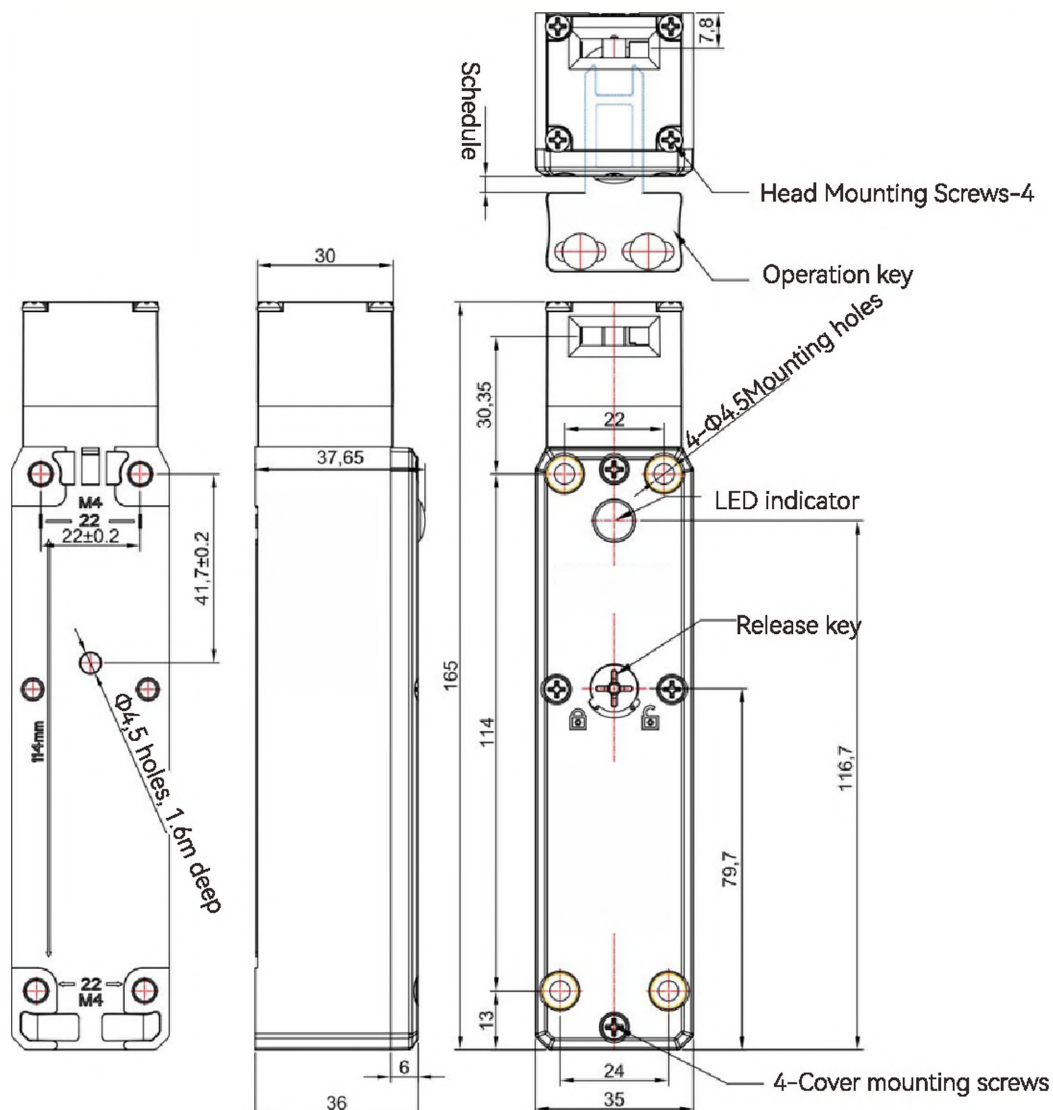

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: auh@nt-rt.ru || сайт: <https://akusense.nt-rt.ru>