

Емкостные датчики СКФ/СКН

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: auh@nt-rt.ru || сайт: <https://akusense.nt-rt.ru>



Basic Features	Working principle	Capacitive sensor				
	Housing	Cylindrical				
	Installation type	Flush			Non-flush	
	Sensing distance	3.0mm	8.0mm	20mm	6.0mm	15mm 30mm
	Thread size	M12	M18	M30	M12	M18 M30
	Sensing surface material	PBT				
	Detected objects	Metal, liquid, powder, wood, paper, plastic and other materials				
	Indicator	Operation Status: LED				
	Sensing range adjustment	Available				
Electrical data	Switching output	Normally Open or Normally Closed				
	Output mode	NPN or PNP Open Collector				
	External input	None				
	Switching frequency	0.1kHz				
	Repeatability	5%				
	Hysteresis	15%				
	Operating Voltage	10~30V DC $\pm 10\%$				
	Current consumption	$\leq 10\text{mA}$				
	Residual Voltage	$\leq 2\text{V}$				
	Load current	150mA	300mA		150mA	300mA
	Leakage current	$< 0.01\text{mA}$				
	Insulation resistance	$> 50\text{M}\Omega$ with 500V DC between power terminals and enclosure				
	Dielectric strength	1,000 VAC, 50/60 Hz for 1 min between power terminals and enclosure				
	Vibration resistance	10 to 55 Hz, 1.5 mm double amplitude, 2 hours for each X, Y, and Z directions				
Environmental conditions	Circuit Protection	Short circuit protection				
	Operating Temperature	$-25\sim 75^{\circ}\text{C}$				
	Operating Humidity	35~85%				
	Enclosure rating	IP67				
Mechanical data	Connection type	2m/3-core Cable				
	Dimension	M12x56.9mm	M18x72.5mm	M30x87.0mm	M12x61.4mm	M18x76.0mm M30x85.0mm
	Material	PBT				
	Weight	0.05kg	0.08kg	0.12kg	0.05kg	0.08kg 0.12kg
	Accessories	Nut M12x1.0	Nut M18x1.0	Nut M30x1.5	Nut M12x1.0	Nut M18x1.0 Nut M30x1.5
Model	NPN NO	CKF12-03[N _{NO}]	CKF18-08[N _{NO}]	CKF30-20[N _{NO}]	CKN12-06[N _{NO}]	CKN18-15[N _{NO}] CKN30-30[N _{NO}]
	Others	[N _{NO}]:NPN Normally open [N _{NC}]:NPN Normally closed [P _{NO}]:PNP Normally open [P _{NC}]:PNP Normally closed				


Cylindrical-CK Series

Dimensions


Unit:mm

M12

CKF12-03□□

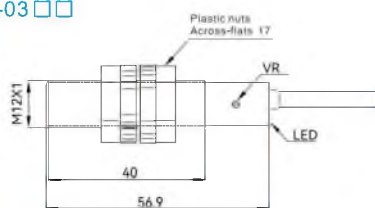


CKN12-06□□

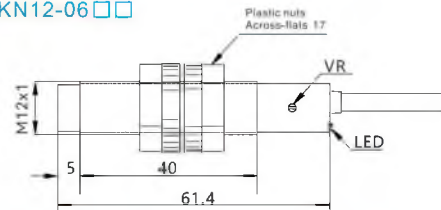


M18

CKF18-08□□

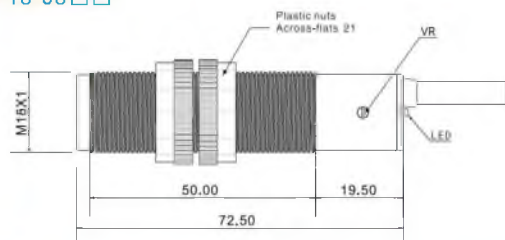


CKN18-15□□

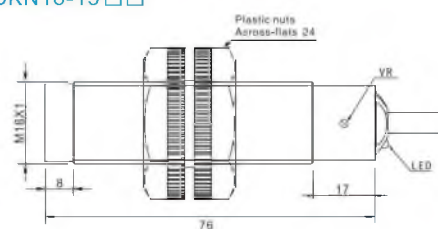


M30

CKF30-20□□

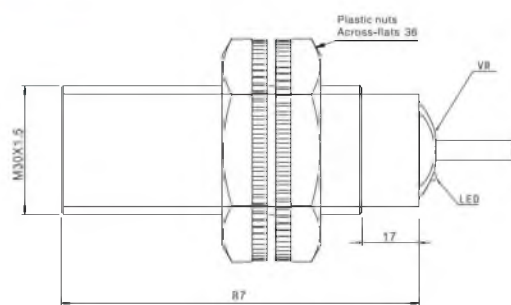

CKN30-30□□

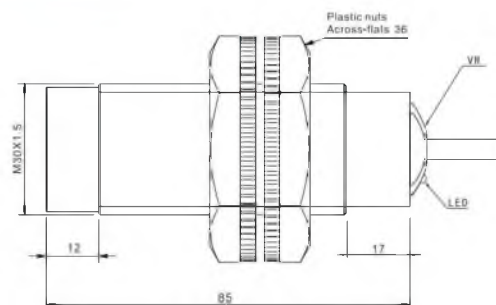

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: auh@nt-rt.ru || сайт: <https://akusense.nt-rt.ru>